

REPLACEMENT PARTS LIST

ITEM	P/N	DESCRIPTION	QTY
1		FORK	1
2	172250	SCREW	1
3	172251	NUT	1
4	SEE #300	POWER UNIT	1
5	172249	HOLD YOKE	1
6	172252	WHEEL YOKE	1
7	172253	CENTRIFUGAL AXLE	2
8	172254	SPACER	2
9	272902	STEERING WHEEL	2
10	172255	SNAP RING	8
11	172256	PIN	2
12	172257	SNAP RING	12
13	172258	BUSH	2
14	172259	LEG	2
15	172260	LEG	1
16	172261	BUSH	2
17	172262	PIN	2
18	172263	WASHER	2
19	172264	NUT	2
20	172265	WASHER	8
21	172266	BALL BEARING	8
22	272753	FRONT WHEEL	2
23	172267	WHEEL AXLE	2
24	272756	ROLLER	4
25	172268	BUSH	2
26	172269	WASHER	4
27	172270	SPRING WASHER	2
28		NUT	2
31		SCREW	1
32		NUT	1
30		STEERING WHEEL ASSEMBLY (INCLUDES #6,9,10,21,31,32)	1

MANUAL HIGH LIFT PALLET JACK

- Two models: Telescoping/Non-Telescoping.
- Moldon polyurethane wheels.
- 180° steering arc.
- Loop handles with inside hand control.
- Closed pallets must be placed on top of forks.
- 1 year pump warranty.
- 6 1/2" wide forks.
- 6" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.

P/N 272975

Model: TSHL20-33

Fork WxL: 20" x 43"

Weight: 260 lbs

Capacity: 3,300 lbs

Telescoping: Yes

Lowered Fork Height: 3.6"

Raised Fork Height: 31.5"

PRINT ISSUED


DEC 1, 2006

WESCO MANUFACTURING
ENGINEERING DEPARTMENTWESCO INDUSTRIAL PRODUCTS INC.
NORTH WALES PENNA. 19454

PART NAME	REV	DATE	BY	CHKD BY
TSHL-20				
Scissor High Lift Pallet Truck				
TOOLING LISTED OTHERWISE SPECIFIED				
REVISIONS				
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

D-272975

MANUAL & ELECTRIC HIGH LIFT LOAD CENTER ILLUSTRATION

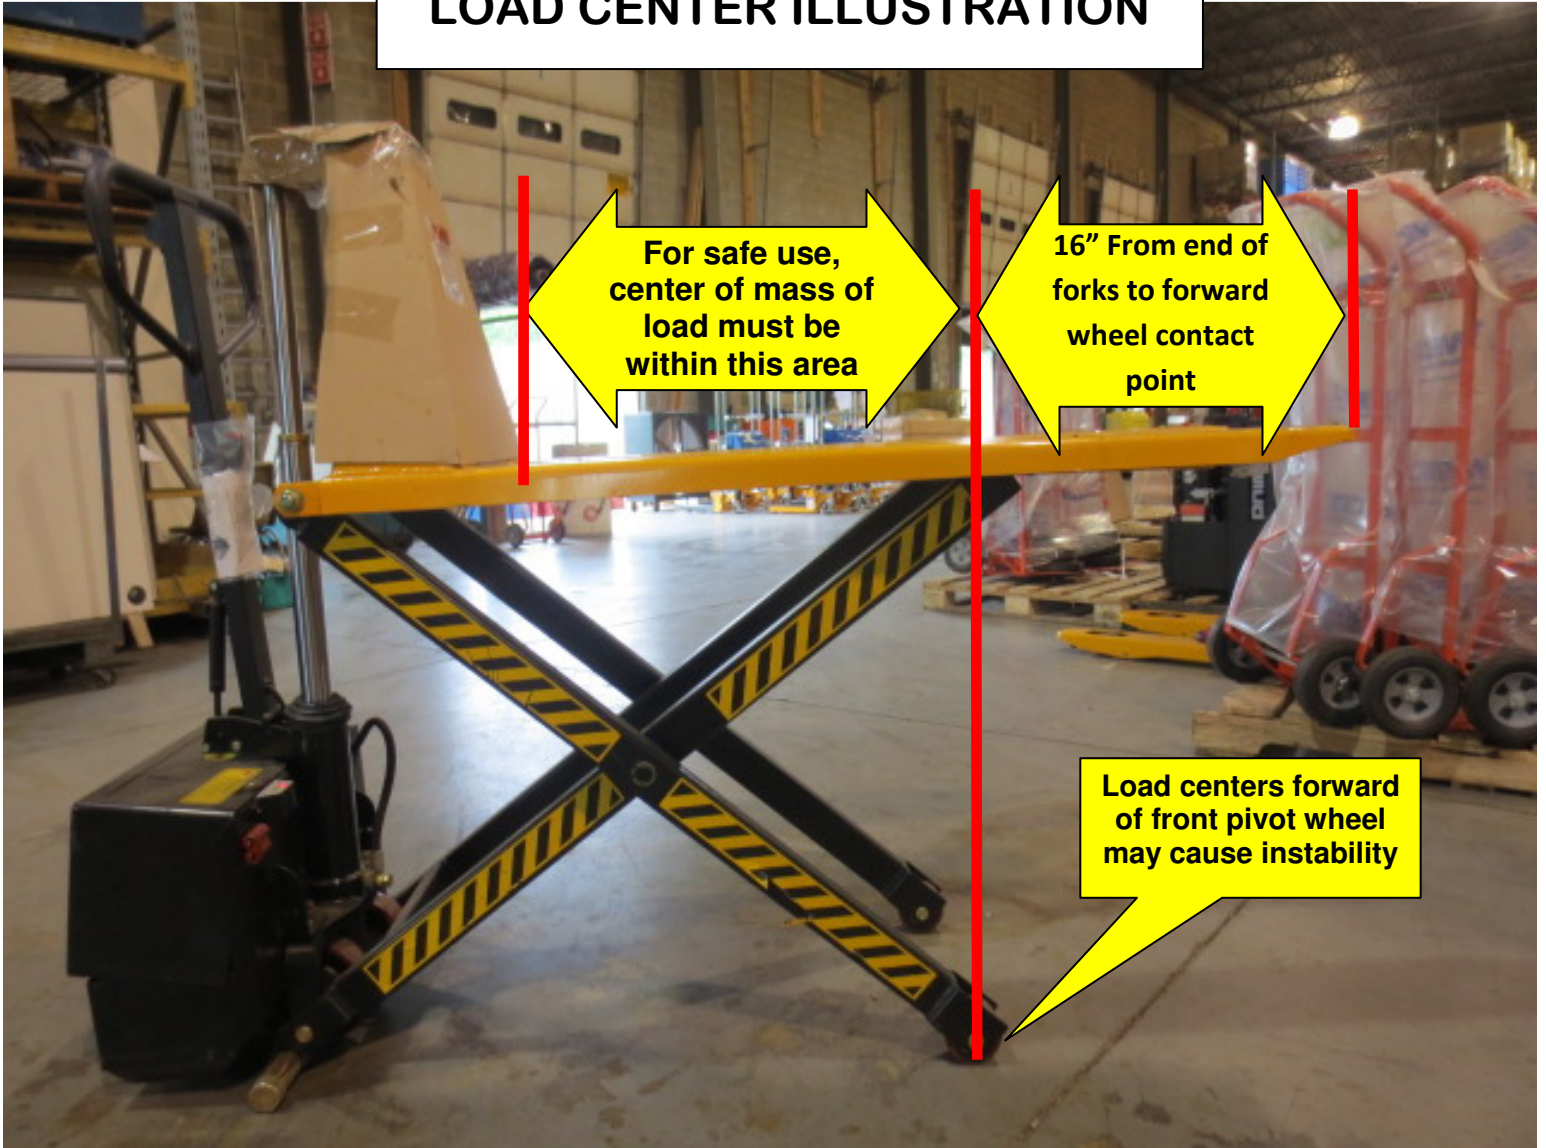

For safe use,
center of mass of
load must be
within this area

16" From end of
forks to forward
wheel contact
point

Load centers forward
of front pivot wheel
may cause instability